SPECIFICATIONS

01100 5	
GNSS Features Channels	1598
GPSGLONASS	L1, L1C, L2C, L2P, L5
BDS	DDC 2: D41 D21 D4C D20 D26*
GALILEOS	E1, E5A, E5B, E6C, AltBOC*
SBAS(WAAS/MSAS/EGNOS/GAGAN))L1* L5*
QZSSMSS L-Band (Reserve)	
Positioning output rate	
Initialization timeInitialization reliability	
Positioning Precision	
Code differential GNSS positioning	
GNSS static	
Real-time kinematic	Vertical: 5 mm + 0.5 ppm RMS Horizontal: 8 mm + 1 ppm RMS
(Baseline<30km)	Vertical: 15 mm + 1 ppm RMS
SBAS positioning	
IMU tilt compensation A	dditional horizontal pole tip uncertainty
IMU tilt angle	than 10mm + 0.7 mm/° tilt down to 30° 0° ~ 60°
Handrian Parfamana	
Hardware Performance Dimension1	135mm(W) ×135mm(L) × 84.75mm(H)
Weight	970g (battery included)
Material Operating temperature	Magnesium aluminum alloy shell25°C ~ +65°C
Storage temperature	40°C ~ +80°C
Humidity Waterproof/Dustproof	100% Non-condensing
	time immersion to depth of 1m
	IP67 standard, fully protected against blowing dust
Shock/Vibration	Withstand 2 meters pole drop onto
Power supply	the cement ground naturally 6-28V DC, overvoltage protection
Battery	Inbuilt 7.2V 6800mAh rechargeable, Li-ion battery
Battery life	15h (Rover Bluetooth mode)
Communications	
I/O Port5-PI	N LEMO external power port + RS232 Type-C interface (charge, OTG, data
	transfer to PC or phone, Ethernet)
Internal UHF	1 UHF antenna interface 2W radio, receive and transmit
	radio router and radio repeater
Frequency range Communication protocol	Farlink, Trimtalk450s, SOUTH,
Communication range	HUACE, Hi-target, Satel
BluetoothBluetooth	3.0/4.1 standard, Bluetooth 2.1 + EDR
NFC CommunicationRea	alizing close range (shorter than 10cm) automatic pair between receiver and
	controller (controller requires NFC
	wireless communication module else)

WIFI	
Modem	802.11 b/g standard
WIFI hotspot	Receiver broadcasts its hotspot form web UI
	accessing with any mobile terminals
WIFI datalink	. Receiver can transmit and receive correction
	data stream via WiFi datalink

Data Storage/Transmission
Storage........4GB SSD internal storage standard, extendable up to 64GB
Automatic cycle storage (The earliest data

files will be removed automatically while the memory is not enough) Support external USB storage The customizable sample interval is up to 20Hz

GPS output data format: NMEA 0183, PJK plane coordinate, Binary code Network model support: VRS, FKP, MAC, fully support NTRIP protocol

and adjusting the receiver temperature

User Interaction Operating system. . Single button Indicators.. .4 LED indicators(satellite, Datalink, Bluetooth, Power) Web interaction... .. With the access of the internal web interface management via WiFi or USB connection, users are able to monitor the receiver status and change the configurations freely Voice guidance.. . It provides status and operation voice guidance, and supports Chinese/English/ Korean/Spanish/Portuguese/Russian/Turkish Secondary development... .. Provides secondary development package, and opens the OpenSIC observation data format and interaction interface definition Cloud service... ... The powerful cloud platform provides online services like remote manage, firmware update,

Items marked with * will be upgraded along with the update of assigned firmware

The data comes from the SOUTH GNSS Product Laboratory, and the specific situation is subject to local actual usage.



online register and etc.



SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.

Add: South Geo-information Industrial Park, No.39 Si Cheng Rd, Guangzhou, China Tel: +86-20-23380888 Fax: +86-20-23380800

E-mail: mail@southsurvey.com export@southsurvey.com impexp@southsurvey.com gnss@southsurvey.com http://www.southinstrument.com http://www.southinstrument.com



G7

— New miniaturized RTK receiver —





Extraordinary GNSS....

The GNSS unit of G7 is integrated with an advanced **SoC** which is a chip comes with the advantage of high integration and low power consumption, efficiently suppress the interference signals, and obtain higher quality observation data from satellite constellations.

Combines with powerful GNSS RTK engine with **1598** channels, and the new generation high sensitivity antenna, G7 achieves centimeter precision in seconds while fully tracking GPS, GLONASS, BEIDOU, GALILEO and QZSS signals.



Brilliant design

Single button boot design, one button evokes all RTK operations.

The body screen adopts a translucent high-strength panel, which has a stronger visual sense of technology. Plus four color indicator lights, common information is clear at a glance.






Smart unit of tilt measurement

An inbuilt high performance **IMU** automatic compensator which corrects the coordinates to the pole tip, that assists users quickly and accurately measure or stake out points at will without strict leveling the receiver, it helps surveyors boost productivity by 30 percent. Furthermore, the compensation is still available even though the fixed solution is lost at a short time, surveyors are able to continue the job after fixed solution recovers without initializing again for the IMU module. And the tilt angle range can achieve to 60°.

Unmatched connectivity

Built-in SOUTH self-developed digital radio, with an advanced protocol "Farlink", makes G7 achieve the typical working range as 8km. The transmission bandwidth of "Farlink" becomes large, and it increases the sensitivity of radio signal capture, which perfectly solves the problem of large data volume of multiple constellations transmission. And the power consumption can reduce about 60% in the same amount of data transmission compare to the traditional RTK.

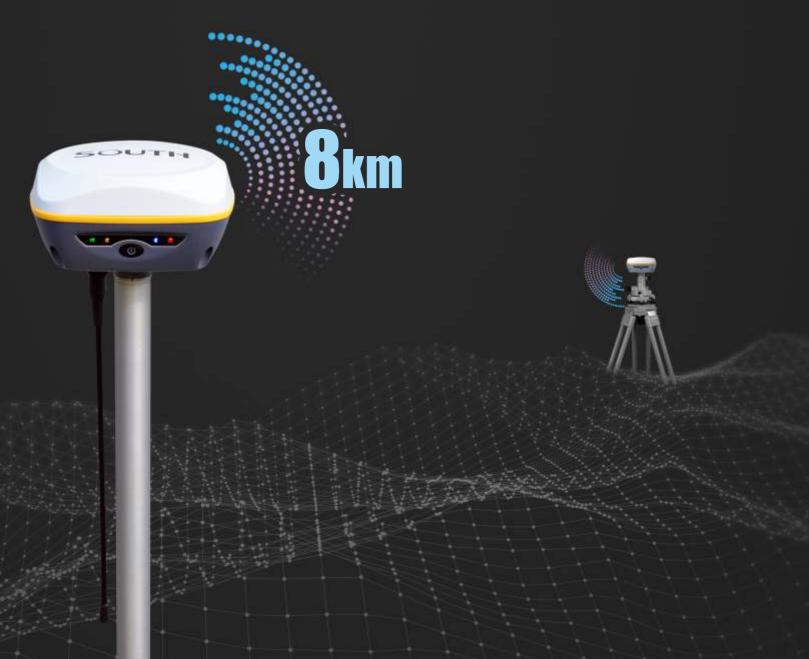



Unlimited productivity

The new generation of SoC platform gives RTK more stable performance and lower power consumption. The built-in 6800mAh high-performance battery can support more than **15 hours** of continuous operation. Featuring with a universal type-C interface, G7 allows to charge the built-in batteries with a PD rapid charger, and support power supply from a power bank to ensure a full-day work.

Both internal memory and web interface are accessed by this type-C interface simultaneously without switching working mode for this port.