

SPECIFICATIONS

GNSS Features

Channels..... 336  
GPS..... L1C/A, L1C, L2C, L2E, L5  
GLONASS..... L1C/A, L1P, L2C/A, L2P, L3  
BDS..... B1, B2, B3  
GALILEOS..... E1, E5A, E5B, E5AltBOC, E6  
SBAS..... L1C/A, L5 (Just for the satellites supporting L5)  
IRNSS..... L5  
QZSS..... L1C/A, L1 SAIF, L2C, L5, LEX  
MSS L-Band..... Trimble RTX<sup>[1]</sup>  
Positioning output rate..... 1Hz~50Hz  
Initialization time..... < 10s  
Initialization reliability..... >99.99%

Positioning Precision

Code differential GNSS positioning... Horizontal: 0.25 m + 1 ppm RMS  
Vertical: 0.50 m + 1 ppm RMS  
GNSS static..... Horizontal: 2.5 mm + 0.5 ppm RMS  
Vertical: 5 mm + 0.5 ppm RMS  
Real-time kinematic..... Horizontal: 8 mm + 1 ppm RMS  
(Baseline<30km) Vertical: 15 mm + 1 ppm RMS  
SLink (RTX)<sup>[2]</sup>..... Horizontal: 4-10 cm Vertical: 8-20 cm  
RTK XTRa (xFill)<sup>[3]</sup>..... Horizontal: 5 + 10 mm/min RMS  
Vertical: 5 + 20 mm/min RMS  
SBAS positioning..... Typically<5m 3DRMS  
RTK initialization time..... 2~8s  
IMU tilt compensation..... Additional horizontal pole tip uncertainty  
typically less than 8mm + 0.6 mm/° tilt down to 30°  
IMU tilt angle..... 0°~60°

Hardware Performance

Dimension..... 15.3cm(φ)×10.6cm(H)  
Weight..... 1.2kg (battery included)  
Material..... Magnesium aluminum alloy shell  
Operating temperature..... -25°C~+65°C  
Storage temperature..... -35°C~+80°C  
Humidity..... 100% Non-condensing  
Waterproof/Dustproof..... IP68 standard, protected from long  
time immersion to depth of 1m  
IP68 standard, fully protected against  
blowing dust  
Shock/Vibration..... Withstand 2 meters pole drop onto  
the cement ground naturally  
Power consumption..... 2W  
Power supply..... 6-28V DC, overvoltage protection  
Battery..... 7.4 V 3400mAh rechargeable,  
removable Lithium-ion battery  
Battery life..... Single battery: 16h (static mode)  
10h (internal UHF base mode)  
12h (rover mode)

Communications

I/O Port..... 5PIN LEMO external power port + Rs232  
7PIN LEMO +external USB(OTG)+Ethernet  
1 UHF antenna interface  
1 GPRS antenna interface  
(internal and external antenna switchable)  
SIM card slot (standard)  
Internal UHF..... Radio receiver and transmitter,  
1W/2W/3W switchable  
Frequency range..... 410-470MHz  
Communication protocol..... Farlink, Trimtalk450s, SOUTH,  
SOUTH+,SOUTHx, HUACE, Hi-target, Satel  
Communication range..... Typically 15km with Farlink protocol  
Cellular mobile network..... Advanced 5G network communication  
module, downward compatible with 4G/3G  
Bluetooth..... BLEBluetooth 4.0 standard, Bluetooth 2.1+EDR  
NFC Communication..... Realizing close range (shorter than 10cm)  
automatic pair between receiver and  
controller(controller requires NFC  
wireless communication module else)

WIFI

Modem..... 802.11 b/g standard  
WIFI hotspot..... Receiver broadcasts its hotspot form web UI  
accessing with any mobile terminals  
WIFI datalink..... Receiver can transmit and receive correction  
data stream via WiFi datalink

Data Storage/Transmission

Storage..... 64GB SSD internal storage  
Automatic cycle storage (The earliest data  
files will be removed automatically while the  
memory is not enough)  
Support external USB storage  
The customizable sample interval is up to 50Hz  
Data Transmission..... Plug and play mode of USB data transmission  
Supports FTP/HTTP data download  
Data Format..... Differential data format: CMR+, CMRx, RTCM 2.1,  
RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2  
GPS output data format: NMEA 0183, PJK plane  
coordinate, Binary code, Trimble GSOF  
Network model support: VRS, FKP, MAC,  
fully support NTRIP protocol

Sensors

Electronic Bubble..... Controller software can display electronic  
bubble, checking leveling status of the  
carbon pole in real-time  
IMU..... Built-in IMU module, calibration-free  
and immune to magnetic interference  
Thermometer..... Built-in thermometer sensor, adopting intelligent  
temperature control technology, monitoring  
and adjusting the receiver temperature

User Interaction

Operating system..... Linux  
Buttons..... 2-button and visual operation interface  
Indicators..... 2 LED indicators, data interaction indicator  
and Bluetooth indicator  
LCD..... 1.54-inch HD color LCD touch screen  
with resolution 240\*240  
Web interaction..... With the access of the internal web interface  
management via WiFi or USB connection, users  
are able to monitor the receiver status and  
change the configurations freely  
Voice guidance..... The intelligent voice technology provides status  
and operation voice guidance, supports  
Chinese/English/Korean/Spanish  
/Portuguese/Russian/Turkish  
Secondary development..... Provides secondary development  
package, and opens the OpenSIC observation  
data format and interaction interface definition  
Cloud service..... The powerful cloud platform provides online  
services like remote manage, firmware update,  
online register and etc

[1] It requires a subscription to data service.  
[2] RTK XTRa also requires a subscription to the data service, and precision  
is dependent on GNSS satellite availability. RTK XTRa positioning ends  
after 5 minutes of radio downtime.  
[3] The RTX accuracies depend on correction service chosen. And 95% of  
the time with initializations are around 5-30 minutes.

Remarks: Measurement accuracy and operation range might vary due to  
atmospheric conditions, signal multipath, obstructions, observation time,  
temperature, signal geometry and number of tracked satellites.  
Specifications subject to change without prior notice



INNO7

- Smart interactive RTK receiver -

5G, brings you  
an outstanding future



5G



VOICE  
INTERACTION



TOUCH OLED



15KM UHF



IMU



64G  
SSD STORAGE



SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.

Add: South Geo-information Industrial Park, No.39 Si Cheng Rd, Guangzhou, China  
Tel: +86-20-23380888 Fax: +86-20-23380800  
E-mail: mail@southsurvey.com export@southsurvey.com impexp@southsurvey.com gnss@southsurvey.com  
http://www.southinstrument.com http://www.southsurvey.com



# 5G Network >>>

## A highway to the era of big data

INNO7 is equipped with a high-speed 5G full netcom module, which supports the latest 5G communication network and gives the RTKs high speed information interaction and wider expansion space in the big data era. Based on intelligent PPP dial up technology, INNO7 realizes automatic dialing in real-time and keeps online during working.







# FarLink Protocol >>>

INNO7 adopts an internal radio with 3W maximum transmission power to achieve the typical working range as 15km through “**Far-link**” protocol.

The transmission bandwidth becomes large, which perfectly solves the problem of large data volume of multiple constellations transmission. And the power consumption can reduce about 60% in the same amount of data transmission compare to the traditional RTK.

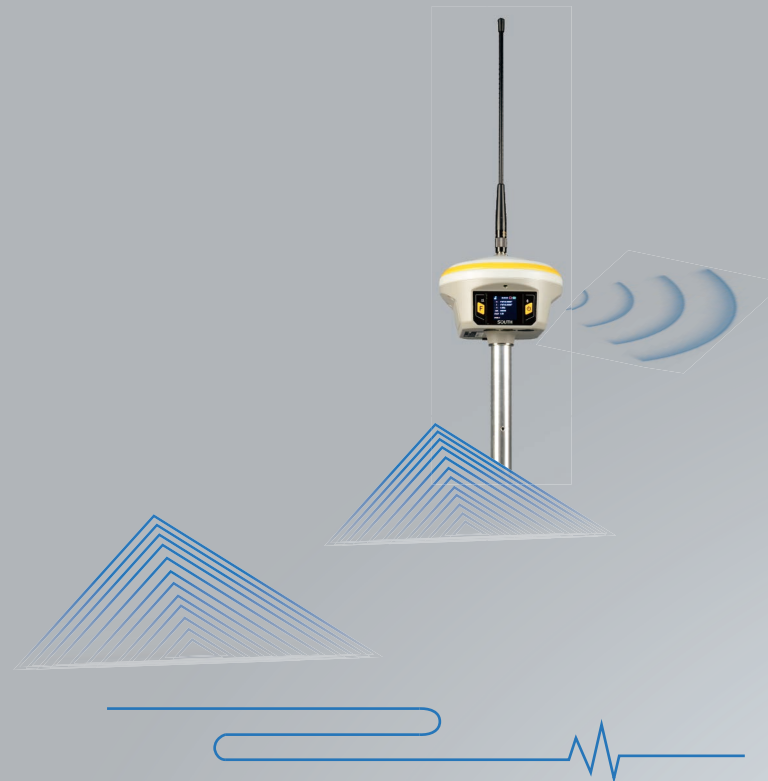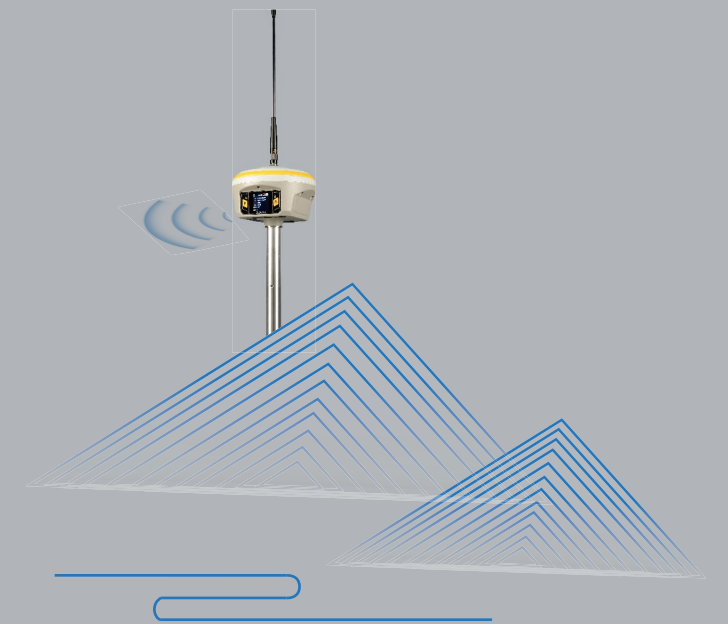

# 15<sub>KM</sub>


**Just use the inbuilt radio only**

It is not a dream to achieve 15km working distance by using the inbuilt radio.



# Touch Screen Interaction >>>

HD 1.54 inch color LCD touch screen with high brightness and low power consumption is more suitable for field work, which is convenient and efficient to complete touch settings, information browsing, function settings.

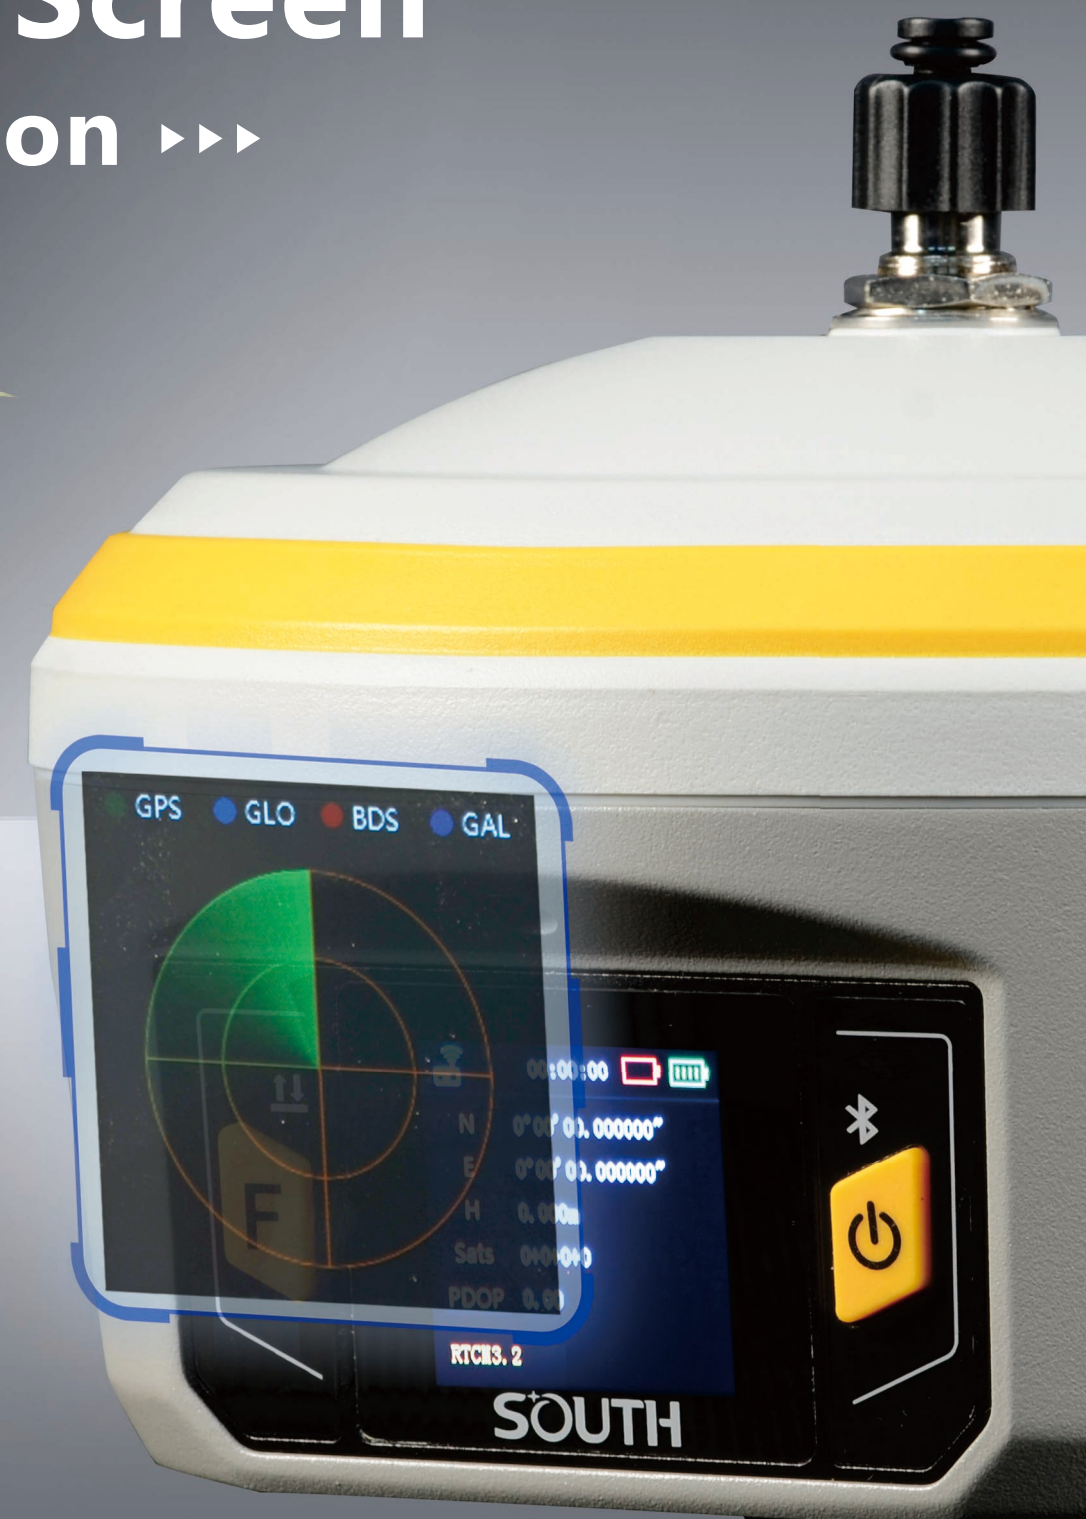




## Slink & RTK XTRa ▶▶▶

Base on the RTX global services, INNO7 is able to achieve the goal of precise single-point positioning without a reference, the positioning is no more constrained by terrain environment, such as mountain, wasteland, desert, island, fixed solution is generally available as long as the GNSS constellations are visible.


Moreover, RTK XTRa technology which is derived from RTX services, it can extend RTK positioning for several minutes while the RTK primary source of correction stream is interrupted or not available, it really makes RTK bright anywhere.

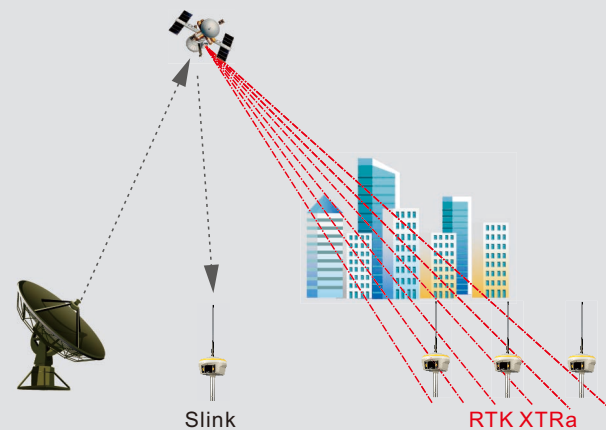

## The 'Fast' IMU ▶▶▶


INNO7 is integrated with a new generation IMU module that it only needs 2-5s of shaking receiver to complete the initialization, and the maximum tilt compensation angle can be 60 degree. it can ignore magnetic interference while RTK receiver works in such a magnetic environment. This professional IMU module can keep the tilt effect for about 40s if RTK receiver stays on a point without moving.

IMU is an electronic unit which records angular velocity and linear acceleration data which is fed into a central processing unit for data interpreting and logging. When the RTK receiver moves, and then it will record the data and send back to the receiver for calculating to output the corrected result of position.

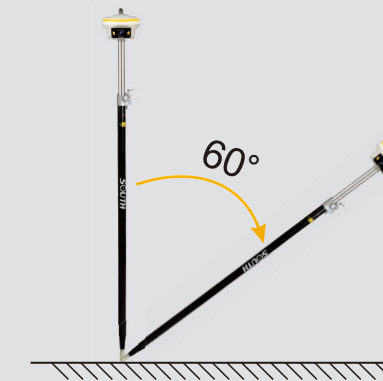

## 64GB SSD ▶▶▶

Built-in 64GB solid-state storage, which can meet most needs of measurement works. And the feature of cyclic storage helps receiver to automatically remove the previous files while there is not enough space in the memory, with this excellent performance, data storage can last almost 4 years based on 5s sampling interval. And the design of embedded memory chip can ensure the safety of measurement data.

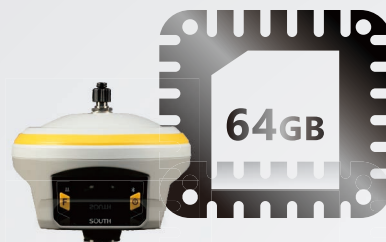

## RTK<sup>2</sup> ▶▶▶

Innovative "dual RTK engine algorithm technology" to achieve secondary coordinate check and calculation, effectively avoiding the problem of fake coordinates, more reliable coordinate accuracy and higher stability.

