

# Specifications

## GNSS Features

Channels	1698
GPS	L1C, L1C/A, L2C, L2P(Y), L5
GLONASS	G1, G2, G3
BDS	B1I, B2I, B3I, B1C, B2a, B2b
GALILEO	E1, E5a, E5b, E6, AltBOC <sup>*</sup>
SBAS	L1 <sup>*</sup>
IRNSS	L5 <sup>*</sup>
QZSS	L1, L2C, L5 <sup>*</sup>
MSS L-Band <sup>*</sup>	Reserve
Positioning Output Rate	1Hz~20Hz
Initialization Time	< 10s
Initialization Reliability	>99.99%

## Positioning Precision

Code Differential Positioning	Horizontal: 0.25 m + 1 ppm RMS Vertical: 0.50 m + 1 ppm RMS
GNSS Static	Horizontal: 2.5 mm + 0.5 ppm RMS Vertical: 3.5 mm + 0.5 ppm RMS
Static (Long Observation)	Horizontal: 2.5 mm + 0.1 ppm RMS Vertical: 3 mm + 0.4 ppm RMS
Rapid Static	Horizontal: 2.5 mm + 0.5 ppm RMS Vertical: 5 mm + 0.5 ppm RMS
PPK	Horizontal: 3 mm + 1 ppm RMS Vertical: 5 mm + 1 ppm RMS
RTK(UHF)	Horizontal: 8 mm + 1 ppm RMS Vertical: 15 mm + 1 ppm RMS
RTK(NTRIP)	Horizontal: 8 mm + 0.5 ppm RMS Vertical: 15 mm + 0.5 ppm RMS
SBAS Positioning	Typically<5m 3DRMS
RTK Initialization Time	2~8s
IMU Tilt Angle	0°~60°

## Hardware performance

Dimension	105mm(φ)*58mm(H)
Weight	540g (battery included)
Material	Magnesium aluminum alloy shell
Operating Temperature	-45°C~+75°C
Storage Temperature	-55°C~+85°C
Humidity	100% Non-condensing
Waterproof/Dustproof	IP68 standard, protected from long time immersion to depth of 1m IP68 standard, fully protected against blowing dust
Shock/Vibration	Withstand 2 meters pole drop onto the cement ground naturally
Power Supply	6-28V DC, overvoltage protection
Battery	Inbuilt 6800mAh rechargeable Lithium-ion battery

## Battery Life

25h (rover mode)

## Communications

I/O Port	Type-C interface (charge+OTG+Ethernet) UHF antenna interface
Internal UHF	Radio receiver
Frequency Range	410-470MHz
Communication Protocol	Farlink, Trimtalk, SOUTH, HUACE, Hi-target, Satel

Communication Range	Typically 8km with Farlink protocol
Bluetooth	Bluetooth 3.0/4.1 standard, Bluetooth 2.1 + EDR
NFC Communication	Support

## Data Storage/Transmission

Storage	16GB SSD internal storage Automatic cycling storage Support external USB storage (OTG) The customizable sample interval is up to 20Hz
Data Transmission	Plug and play mode of USB data transmission Supports FTP/HTTP data download Static data format: STH, Rinex2.01, Rinex3.02 and etc. Differential data format: RTCM 2.1, RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2
Data Format	GPS output data format: NMEA 0183, PJK plane coordinate, Binary code Network model support: VRS, FKP, MAC, fully support NTRIP protocol

## Sensors

IMU	Built-in IMU module, calibration-free, 60°
Camera	Visual positioning camera: 8MP (can be used in AR stakeout) AR stakeout camera: 2MP
Electronic Bubble	Controller software can display electronic bubble, checking leveling status of the carbon pole in real-time
Thermometer	Built-in thermometer sensor, adopting intelligent temperature control technology, monitoring and adjusting the receiver temperature

## User Interaction

Operating System	Linux
Buttons	Single button
Indicators	Power, Bluetooth, data and satellites indicators
Web Interaction	With access to Web UI via WiFi or USB connection, users can monitor the receiver status and change the configurations
Voice Guidance	Chinese/English/Korean/Spanish/Portuguese/Russian/Turkish/French/Italian
Secondary Development	Provides secondary development package, and opens the OpenSIC observation data format and interaction interface definition
Cloud Service	The powerful cloud platform provides online services like remote management, firmware updates, online registers, etc.

<sup>\*</sup>Reserve for future upgrade.

Remarks: Measurement accuracy and operation range might vary due to atmospheric conditions, signal multipath, obstructions, observation time, temperature, signal geometry and number of tracked satellites. Specifications subject to change without prior notice.



Explore more features:

# SOUTH

Target your success

Powered By  
S805



## INNO4 VISUAL POSITIONING RTK

- ✓ Dual Camera Visual Positioning
- ✓ Dual Camera AR Stakeout
- ✓ 3D Modeling by Video Shooting
- ✓ A Few of Ways for Data Processing
- ✓ 1698 channels S805 Inside
- ✓ Dual-Engine Algorithm
- ✓ Farlink 2.0 Radio
- ✓ 5<sup>th</sup> generation IMU

**SOUTH**  
Target your success

**SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.**

Add: South Geo-information Industrial Park, No.39 Si Cheng Rd, Guangzhou, China  
Tel: +86-20-23380888 Fax: +86-20-23380800  
E-mail: mail@southsurvey.com export@southsurvey.com impexp@southsurvey.com gnss@southsurvey.com  
http://www.southinstrument.com http://www.southsurvey.com

# Five New Features — To Give You More Productivity

## S805, the New Pop Star Save Weak Signal

SOUTH S805 has 1698 channels to track more satellites and weak signals.

The success rate and speed of obtaining a fixed solution has been greatly improved. Under the dense forest and surrounded by buildings, it just takes tens of seconds to get a fixed solution.

## Dual Camera AR Stakeout Extra Convenience

INNO4 allows you to use both of front camera and bottom camera to stakeout points, lines, curves.

The AR guideline on controller app will indicate you to go to the correct direction since you are tens of meters away from the target.

## Dual-Engine GNSS Positioning Algorithm

Unlike traditional GNSS receivers, the INNO4 is equipped with two different positioning algorithms.

When users encounter inaccurate VRS RTK positioning due to unusually active ionospheric conditions, they can enable the second set of algorithms in the software to correct errors in real-time and improve measurement accuracy. (by selecting Enhanced Positioning Mode in the SurvStar app.)

## Farlink 2.0 Radio More Performance

When compared with the last generation Farlink, INNO4s Farlink 2.0 radio can undertake larger data and provide more stable transmission, working range is as far as 10-12 km in ideal condition.

With the "lock-base" function, INNO4 can keep receiving data from one specific base. Even though several bases are transmitting with the same frequency

## The 5<sup>th</sup> Gen. IMU New Experience

The latest update of IMU effectively eliminates the loss of Inertial-Measurement-Usable Status in the majority of scenarios, enhancing IMU availability and productivity.

During AR stakeout, visual positioning and 3D modeling collection, you can walk at your own pace without worrying about losing IMU, making workflow smooth.

# INNO4




## Visual Positioning

—Do What Traditional RTK Cannot Do



### More Efficient than Traditional RTK

INNO4 processes a group of photos or a video in real-time, obtaining coordinates for hundreds of points within minutes. It outpaces traditional RTK in data acquisition speed. INNO4 also has a broader working range and fewer blind spots, enabling remote measurements in areas with poor GNSS signal quality. Previously challenging spots, like spaces under rooftops and areas with obstacles, are now easily measurable.

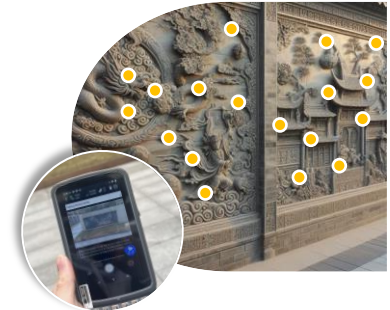

### More Versatile than Traditional RTK

Leveraging visual positioning, surveyors can efficiently operate in the field. Image data, stored for an extended period, is reusable at any time. These capabilities are especially well-suited for unique GNSS measurement tasks, such as documenting accident scenes and excavation sites for urban public facilities.



**SOUTH**  
Target your success



### More Friendly than Traditional RTK

INNO4 visual positioning allows surveyors to remotely measure points up to 10 meters or more (in ideal conditions), eliminating the need to physically approach each point. This method significantly reduces physical effort in fieldwork.

### Safer than Traditional RTK

Visual positioning helps users mitigate risks when surveying near hazardous areas, such as busy roads and lakes, ensuring surveyors' safety. A secure working approach is not only a personal requirement but also essential for the well-being of your family.

# 3D Modeling

## —Broadening Your Working Power


INNO4 utilizes SOUTH's 3D modeling technology, integrating image measurements seamlessly with UAV data from DJI and other brands. Addressing data gaps in UAV surveys,

INNO4 enhances survey outcomes by supplementing incomplete models with ground image data collection.


INNO4 facilitates streamlined single-user 3D modeling, visually presenting geographic information such as coordinates, areas, and volumes. Effortlessly convert model data into various formats and tailor coordinate parameters to meet the needs of different applications.

Surveyors can integrate INNO4 data into SOUTH software and third-party modeling software for efficient 3D modeling.

Upcoming versions of SGO (PC) and SurvStar (Android App) will incorporate 3D modeling functions, enabling users to choose the most suitable software for optimal work efficiency based on their specific scenarios and task requirements.



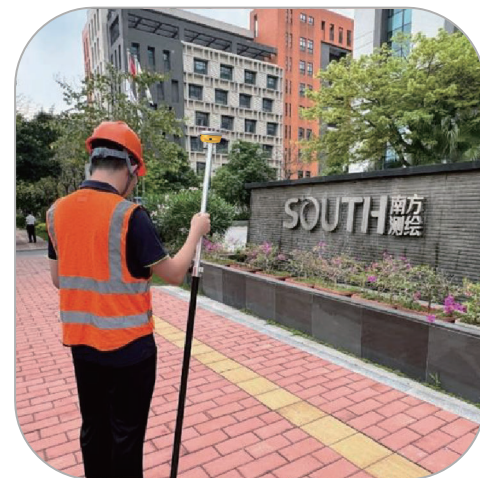


# A Few Ways to Process Images —Tailored for Your Work Needs

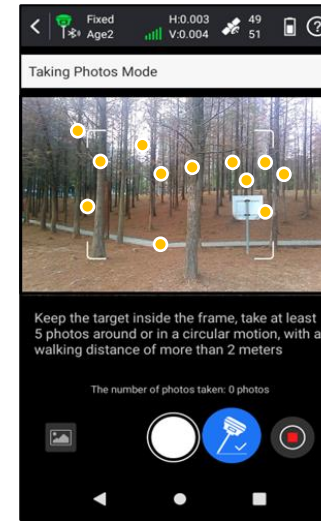

**Cloud Server Online Processing**  
Acquire data timely and precisely

Scan here  
watch video

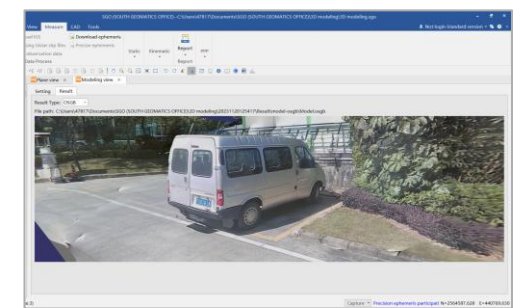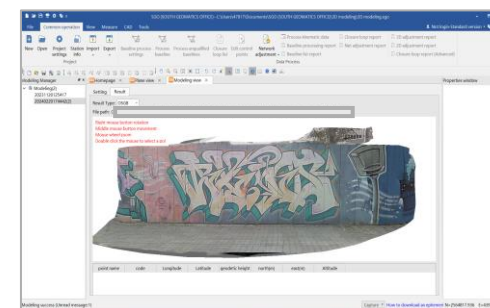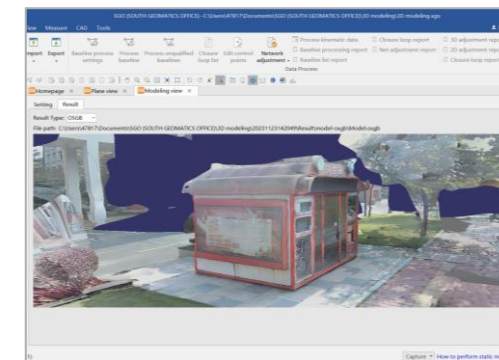

**Desktop Software Processing**  
Ultra accurate and detailed

Scan here  
watch video

